


Identification of Materials in Hyperspectral Images Using an Autoencoder and Relu Activation

Mira Welner², Dr. Aswin Sankaranarayanan¹

Carnegie Mellon University¹, University of California, Davis²

Hyperspectral images are used to identify materials, objects, and chemical processes in a scene. Each pixel in a hyperspectral image is a spectral profile that characterizes the intensity of light at that pixel as a function of wavelength. Since material has unique spectra, hyperspectral images are often used to identify the presence and relative abundances of materials in a scene. However, identifying which materials can be found in a scene is often a slow and difficult process. The goal of this project is to use an autoencoder to identify the dominant materials found in a hyperspectral image in an unsupervised manner.

The objective of this project is to use machine learning to compress hyperspectral images into their three primary component materials and find the corresponding spectra, identifying the material.

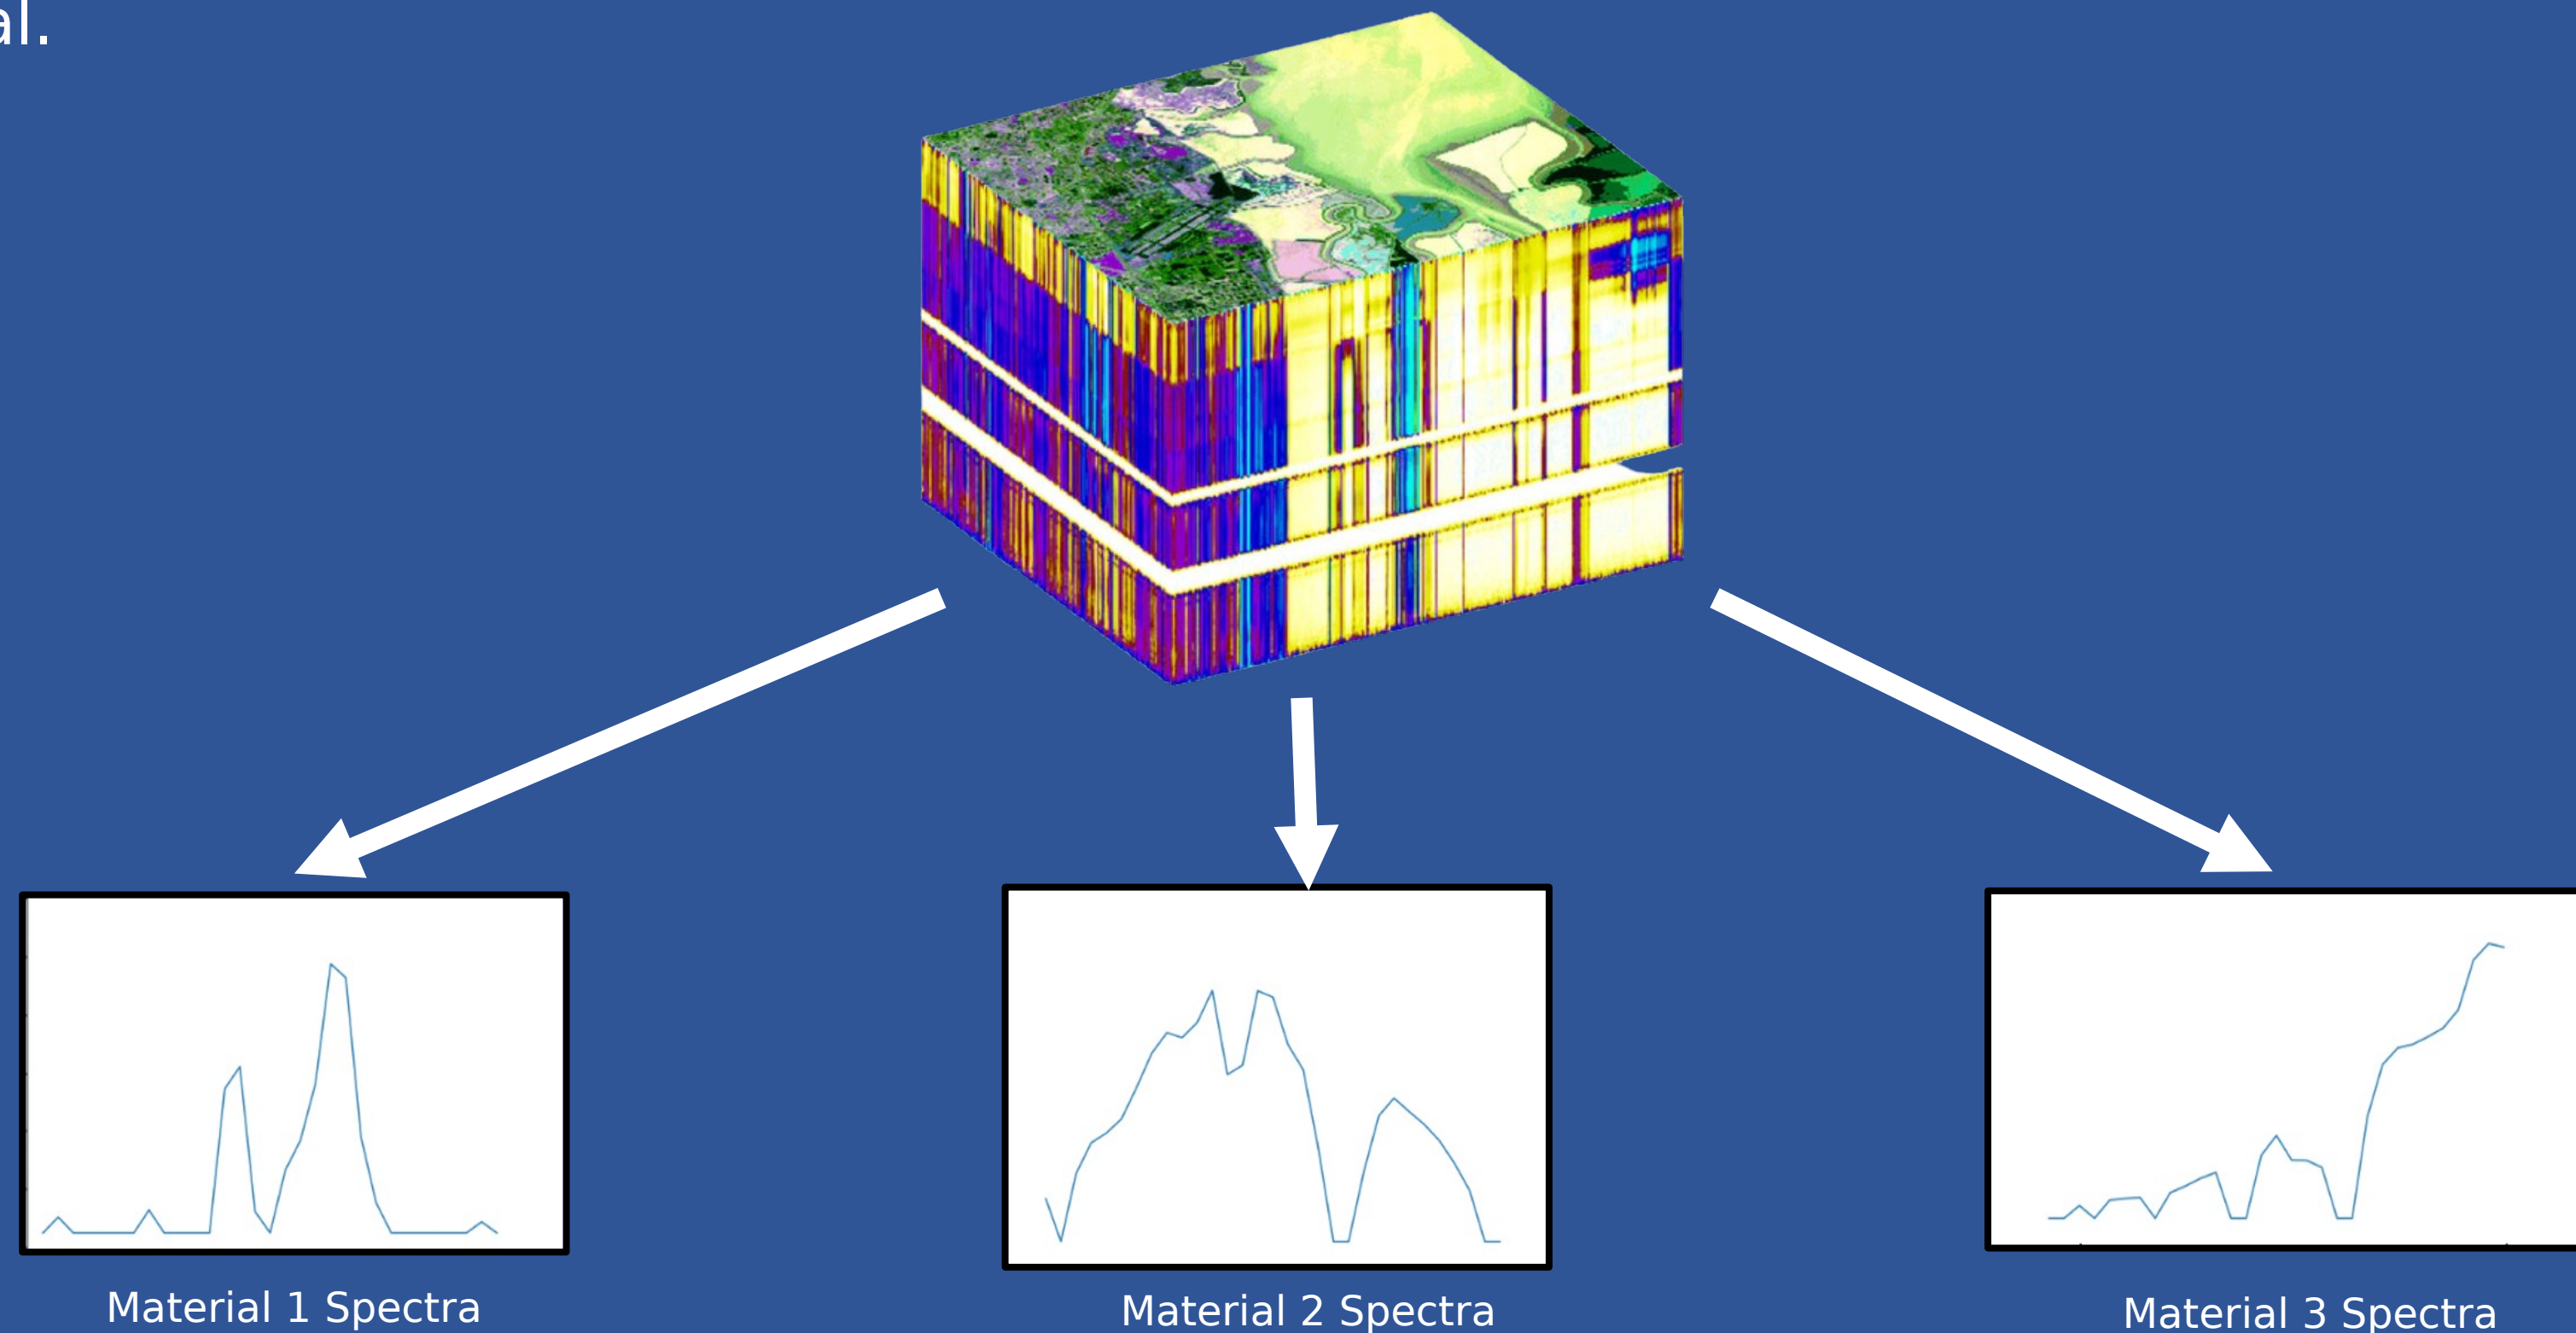

HYPERSPSPECTRAL IMAGE DECOMPOSITION AND MATERIAL IDENTIFICATION THROUGH AUTOENCODERS

Mira Welner², Dr. Aswin Sankaranarayanan¹

Carnegie Mellon University¹, University of California, Davis²

Our method relies on the interesting observation that the spectral complexity of most scenes can be well approximated with three material and two lighting spectra (Finlayson, Drew, and Funt 1993). As a result, it was assumed that the hyperspectral images had three main materials, with each material being represented by a unique spectra, and a material map [4]. The light sources were not considered in this initial study. Given this, the hyperspectral image $h(x, y, \lambda)$ can be represented by the following equation:

$$h(x, y, \lambda) = \sum_{r=0}^2 \pi_r(\lambda) \alpha_r(x, y),$$

where $\pi_r(\lambda)$ is the spectra corresponding to the r -th material map, and $\alpha_r(x, y) \geq 0$ being the r -th material map.

Since most datasets do not have ground truth material spectra and maps, we designed an unsupervised approach for estimating them. Specifically, we train an autoencoder [5] for hyperspectral images that is endowed with some key properties. First, the decoder is designed to implement the above equation, which attributes physical meaning to the outputs of the encoder. Second, the encoder is designed to output the three spectral profiles, subsequently, the material map is estimated at each pixel under the assumption that the spectrum at any given pixel lies in the conic hull of the material spectra. Third, we train the autoencoder end-to-end and the network learns to recognize the three dominant materials. The dataset used to train our autoencoder was sourced from the Harvard Real World Hyperspectral Images Database (Chakrabarti and Zickler 2011). The autoencoder was designed with Keras (Chollet et al. 2015).



HYPERSPPECTRAL IMAGE DECOMPOSITION AND MATERIAL IDENTIFICATION THROUGH AUTOENCODERS

Mira Welner², Dr. Aswin Sankaranarayanan¹

Carnegie Mellon University¹, University of California, Davis²

Results

After running for 25 epochs a validation loss of 0.0130 was achieved. Loss was determined by the normalized mean squared error. As seen in the left figure, the recreated spectra for many of the pixels were quite similar to the original spectra, likely due to the spectra being optimized for over the material maps. However as seen in the right figure, the reconstructed material maps are somewhat less similar to the original material maps, likely because the material maps are not specifically trained by the model but are rather created as a result of the trained spectra.

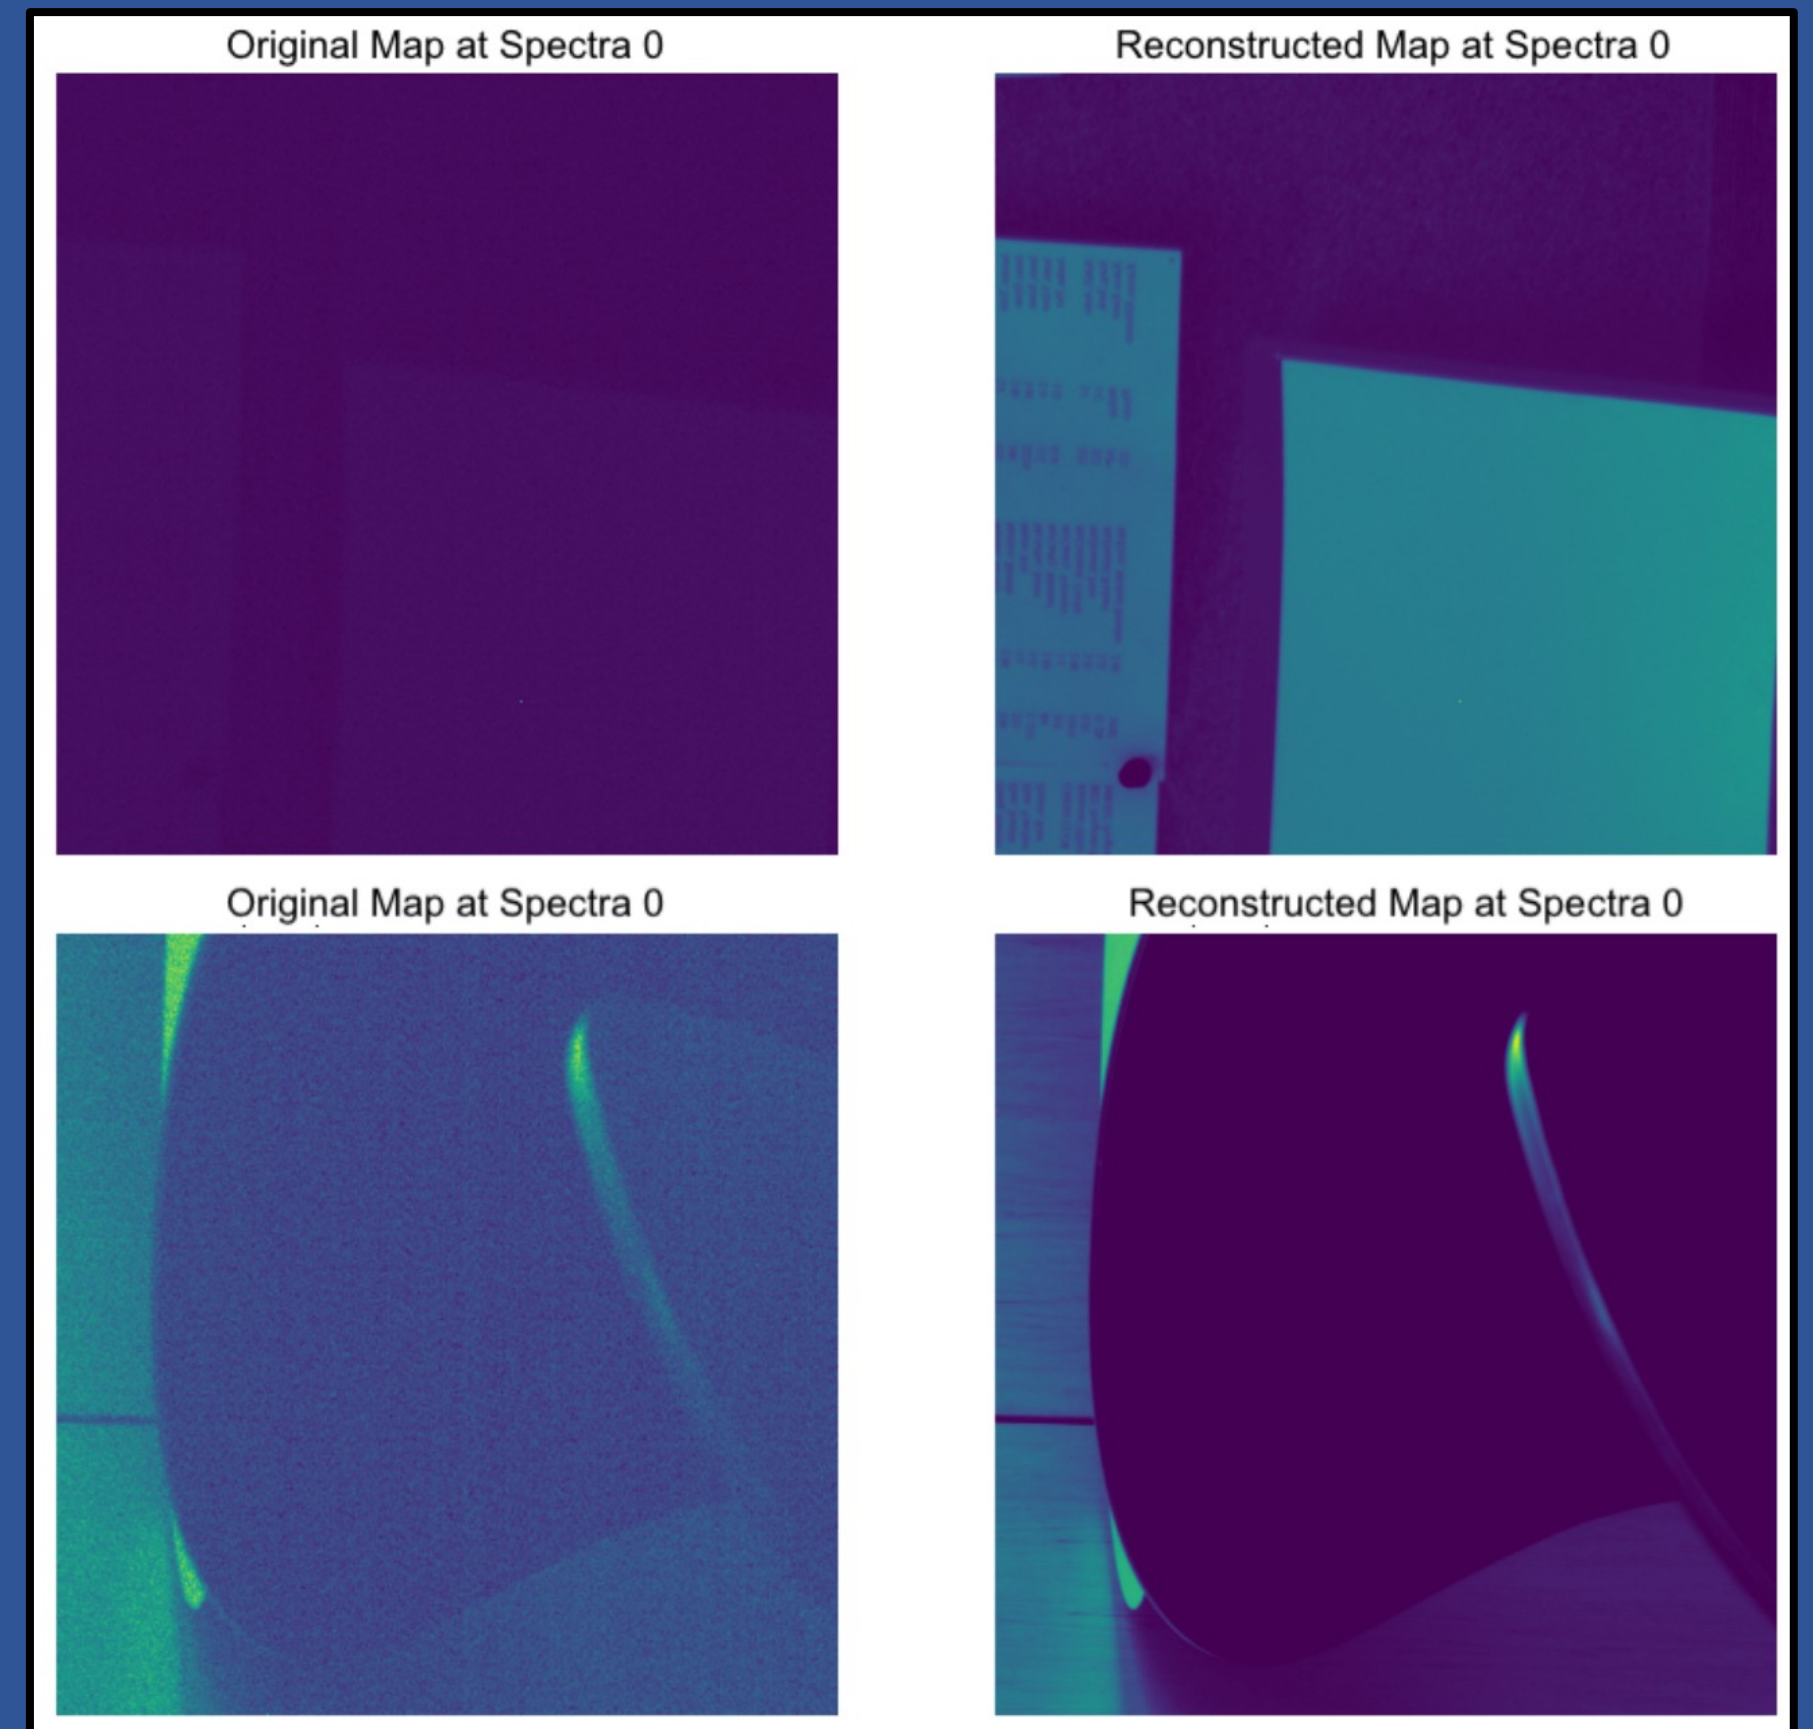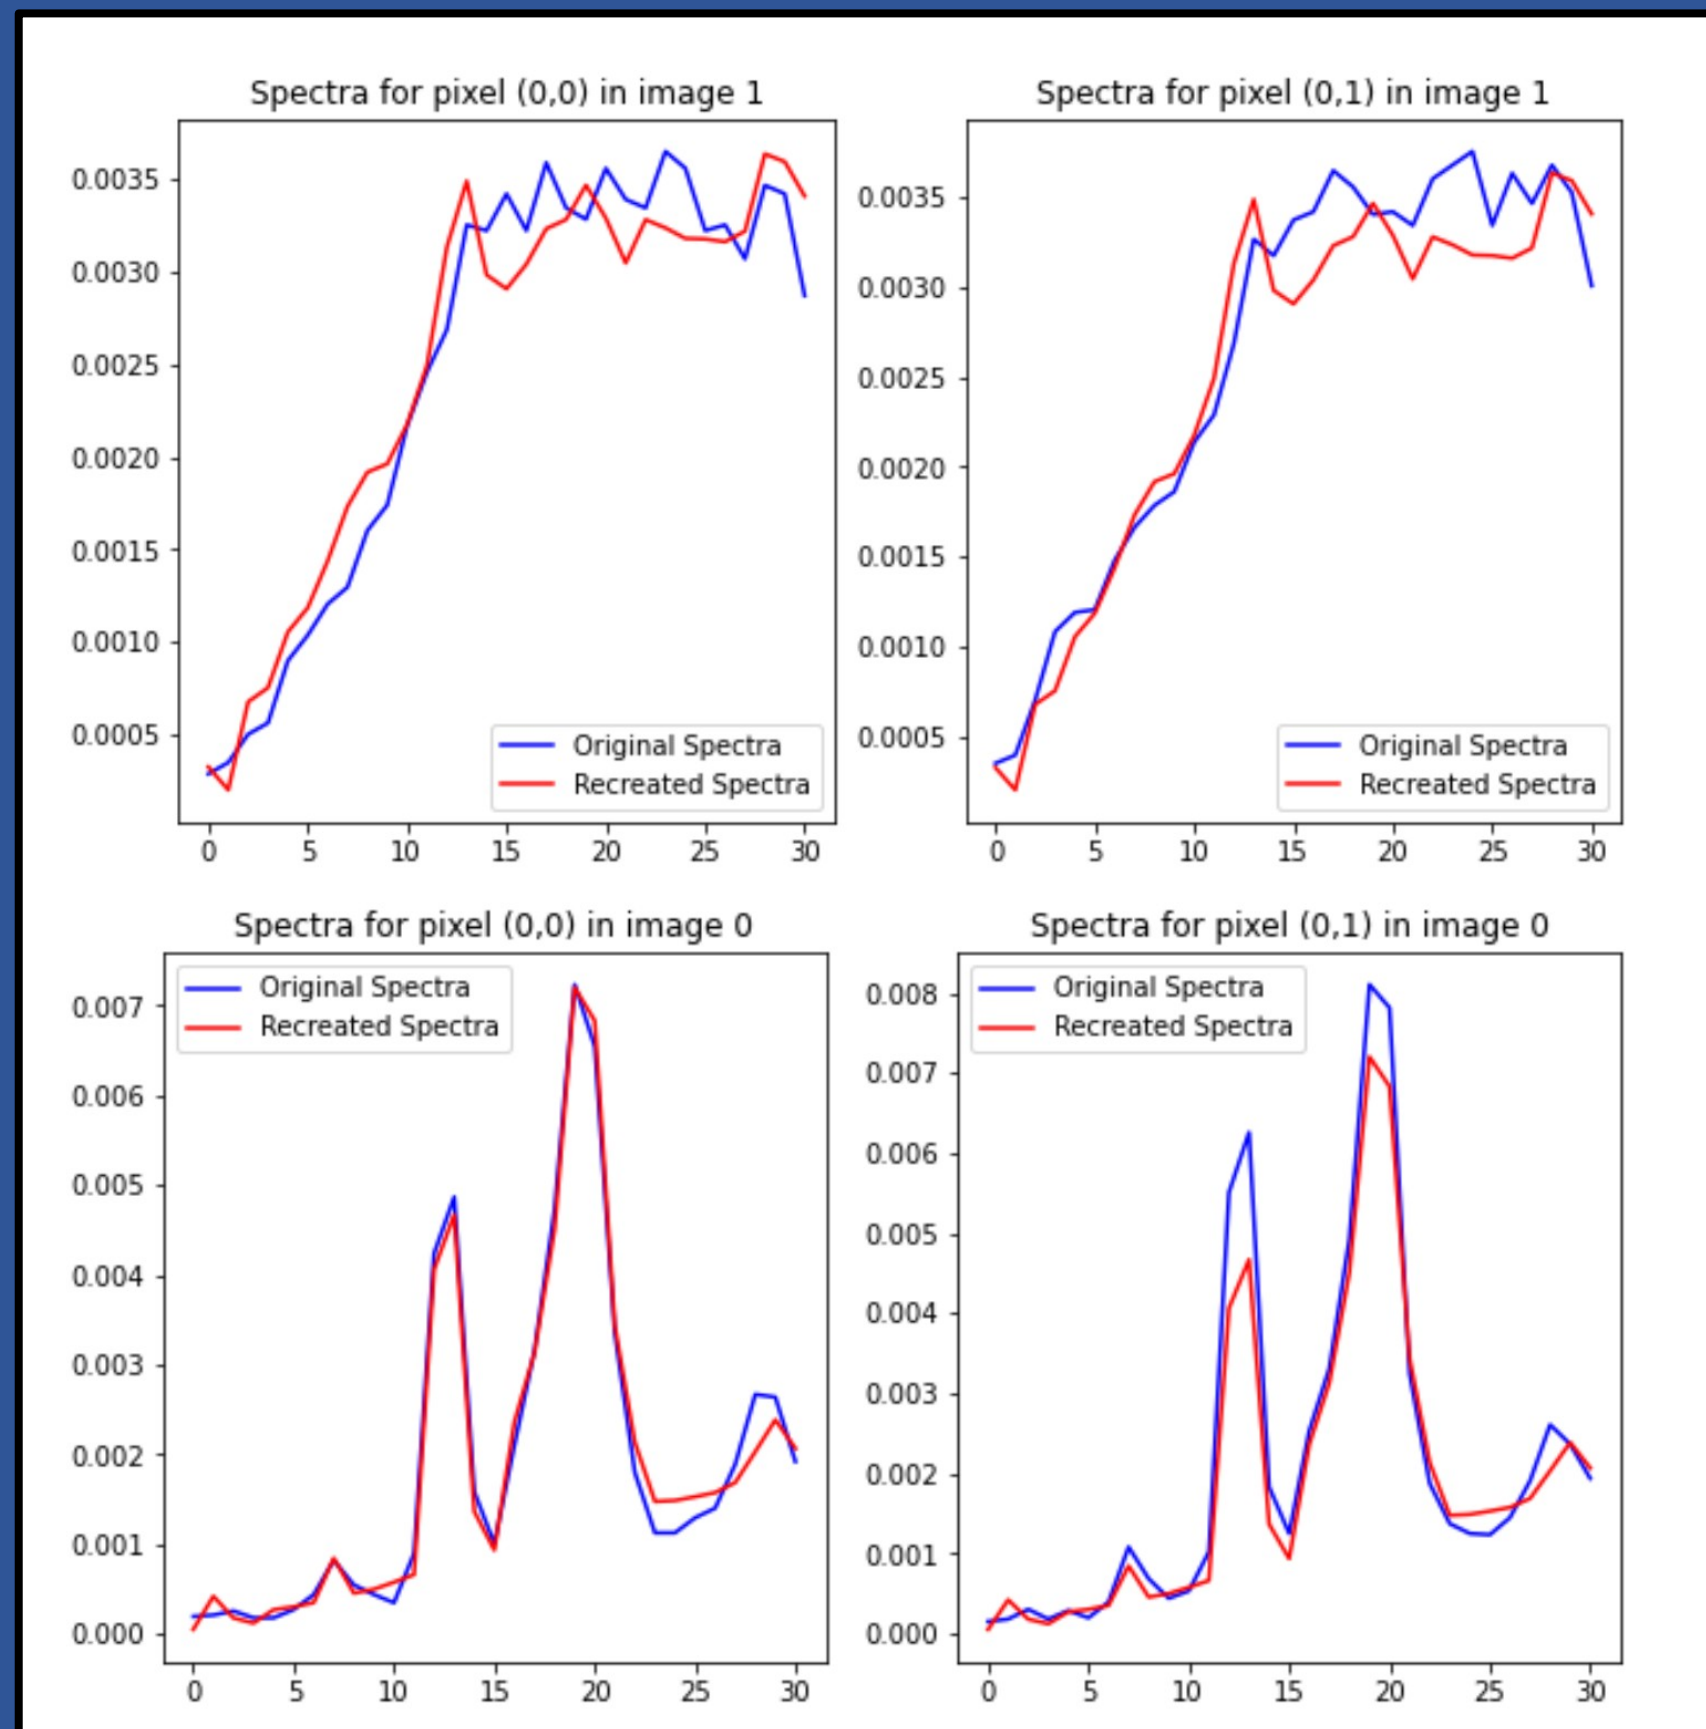


HYPERSENSPECTRAL IMAGE DECOMPOSITION AND MATERIAL IDENTIFICATION THROUGH AUTOENCODERS

Mira Welner², Dr. Aswin Sankaranarayanan¹

Carnegie Mellon University¹, University of California, Davis²

The trained model was then split into a decoder and an encoder. The encoder portion compressed a hyperspectral image into the spectra of its three primary materials. An image of a wooden floor generated the three spectra seen below

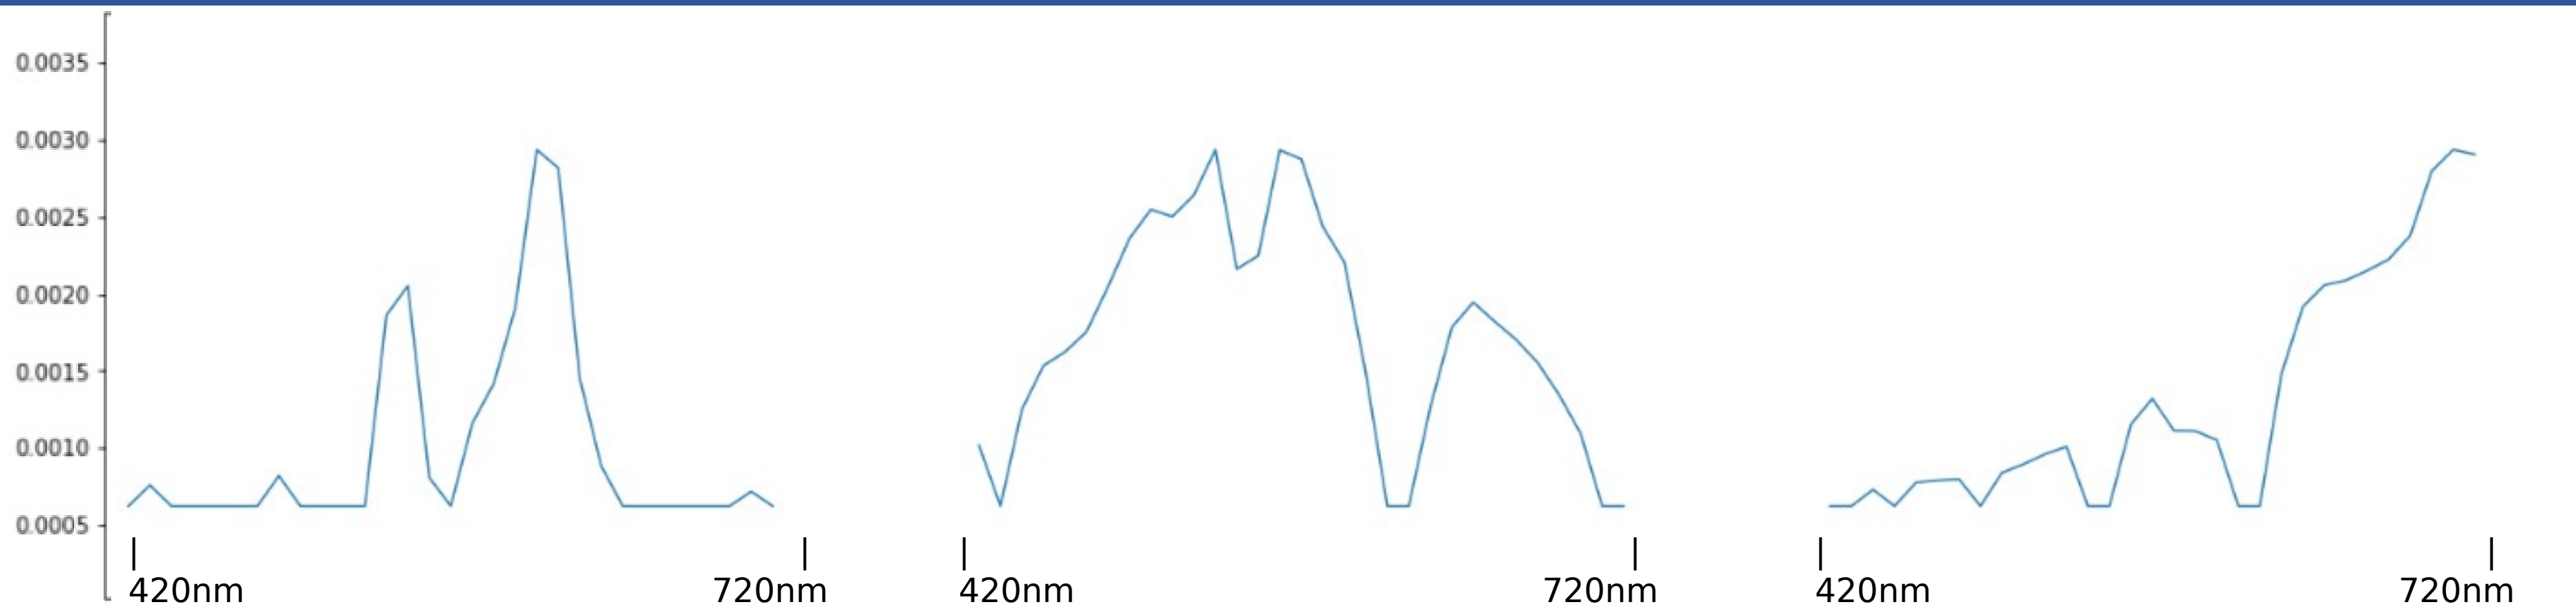

Future Work

Future research will investigate whether the spectra displayed are similar to materials likely to be found in the scene, improve the accuracy of the material maps, and improve the ability of the model to generalize on scenes different from the Harvard dataset.

Acknowledgements

This research was supported by the National Science Foundation under the Expeditions in Computing award 1730147, as part of an REU project.

References:

- Chakrabarti, A.; and Zickler, T. 2011. Statistics of Real World Hyperspectral Images. In *Proc. IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*, 193–200.
- Chollet, F.; et al. 2015. Keras. <https://keras.io>.
- Finlayson, G.; Drew, M.; and Funt, B. 1993. Diagonal transforms suffice for color constancy. In *1993 (4th) International Conference on Computer Vision*, 164–171.
- Kokaly, R. F.; King, T. V.; and Hoefen, T. M. 2011. Mapping the distribution of materials in hyperspectral data using the USGS Material Identification and Characterization Algorithm (MICA). In *2011 IEEE International Geoscience and Remote Sensing Symposium*, 1569–1572.
- Liou, C.Y.; Cheng, W.C.; Liou, J.W.; and Liou, D.R. 2014. Autoencoder for words. *Neurocomputing*, 139: 84– 96.